EN Quick Start Guide

English

Safety instructions

Please read the following before using Creative products:

- To be completely disconnected from the power input, the mains plug has to be disconnected/ detached from the mains.
- Disconnect the mains plug when the device is expected to be unused for several days.
- Remove the batteries when not in use for an extended period of time.

Additional guidelines for *Bluetooth* devices

- The short wave radio frequency signals of a *Bluetooth* device may impair the operation of other electronic and medical devices
- Switch off the device where it is prohibited. Do not use the device in medical facilities, aircraft, refueling points, close to automatic doors, automatic fire alarms or other automatically controlled devices
- Keep this device at least 20 cm from pacemakers and other medical devices. Radio waves may impair the operation of pacemakers and other medical devices

Safety information for battery

- The battery must be recycled or disposed of properly. Contact local agencies for recycling and disposal information.
- Do not allow metal objects to touch the terminal of the battery.
- If there is leakage, an offensive odor, discoloration or deformation during charging or use, remove the battery and do not use it again.
- Clean your hands well before touching food or sensitive areas, such as, your eyes.
- Do not expose to excessive heat such as sunshine, fire or the like.
- The following statement only applicable to products containing "CR" type lithium coin cells:

Perchlorate material special handling may apply
see www.dtsc.ca.gov/hazardouswaste/perchlorate

CAUTION: Risk of explosion if battery is replaced by incorrect types.

Technical Specifications

- Input Rating: 100 - 240V ~ 50/60Hz 400mA
- *Bluetooth* Version : *Bluetooth* 2.1 + EDR (Enhanced Data Rate)
- Operating Frequency: 2402 - 2480 MHz
- Supported *Bluetooth* profiles* : A2DP (Wireless Stereo *Bluetooth*), AVRCP (*Bluetooth* Remote Control)
- Operating Range: Up to 10 meters (Measured in open space. Walls and structures may affect range of device.)

Compatibility Disclaimer

Wireless performance is dependent on your device's *Bluetooth* wireless technology. Refer to your device manufacturer's manual.
Creative will not be liable for any loss of data or leakage resulting from the use of these devices.

Notes

* Refer to your *Bluetooth* device (notebook[1], PC[1], mobile device[2]) manufacturer's documentation/ website for supported profiles.

[1] Compatible with PC (Windows XP/Vista/7), Apple Macintosh equipped with *Bluetooth* wireless stereo

[2] Compatible with most major brands of *Bluetooth* A2DP enabled mobile phones and A2DP enabled mobile phones (including iPhone, Windows Mobile)

1 Product Overview / Connectivity Diagram

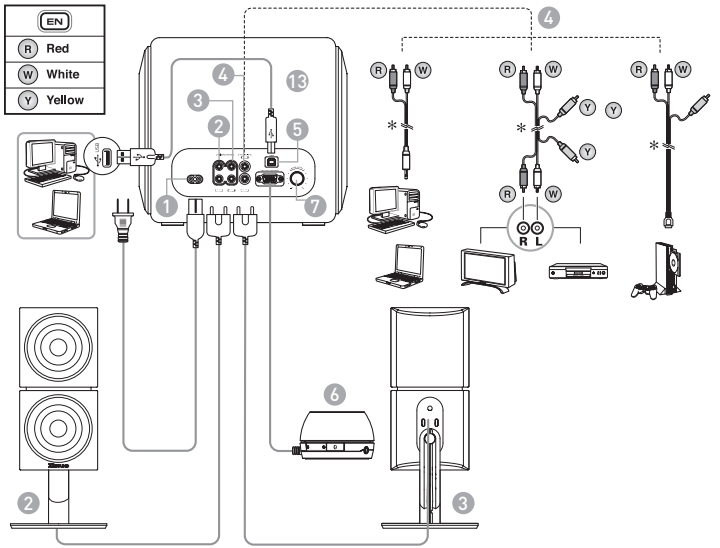

1. AC IN
2. Right Satellite Speaker
3. Left Satellite Speaker
4. Audio In - To analog audio in
5. USB – USB Audio
6. Audio Control Pod
7. Bass Level Control

* optional (sold separately)

Side views of the Audio Control Pod:

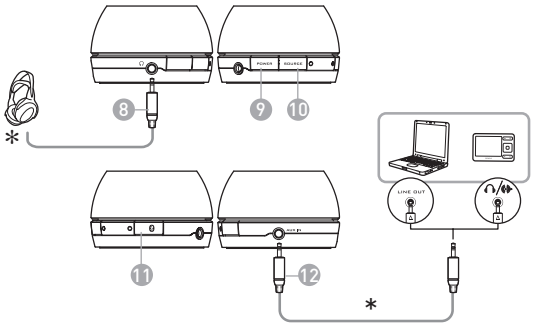

Audio Control Pod LED status indications:

GREEN – Line-In/ AUX In
AMBER – USB Audio
BLUE – *Bluetooth* Connection

8. Headphone
9. Power ON/OFF
10. Source
11. CONNECT Button – *Bluetooth* Pair and Connection
12. AUX In – Auxiliary line-in for Audio Devices
13. SLAM™ Subwoofer

* optional (sold separately)

2 Remote Control overview

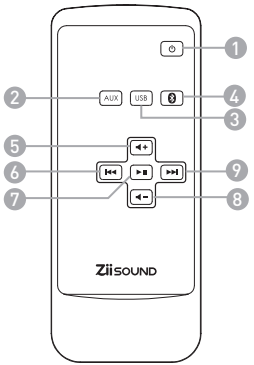

1. Power
2. AUX Source
3. USB Audio
4. *Bluetooth Stereo Source*
5. Volume +
6. Previous Track
7. Play/ Pause
8. Volume -
9. Next Track

To replace the battery in the remote control

- Depress (A) and pull out (B)
- Replace the battery with the positive polarity facing upward and push (B) back to remote control



The remote control uses a CR2025 3V lithium coin battery

3 Enjoy high performance wireless audio from ZiiSound T6 via Bluetooth® Audio Transmitter BT-D1



1: LED Status Indicator
Indicate the current status of the USB *Bluetooth* Transmitter

2: CONNECT button
A multi function button used to perform pairing and disconnection

A Bluetooth® Audio BT-D1 is paired with ZiiSound T6 at factory. Simply insert the BT-D1 into your PC to enjoy the high quality wireless audio.

B Wait for computer to install hardware

C Power on the speaker and the LED status indicator will show green.

Note: Allow the flashing LED indicators to stop after plugging the speaker system to the mains. This indicates that the speaker system is initialized and ready to be powered ON.



D Press once and release the CONNECT button. The LED will show blinking Blue then steady Blue LED indicating ZiiSound T6 is ready to stream music.



4 To pair and CONNECT the ZiiSound T6 with other *Bluetooth* devices

A Power on the speaker and the LED status indicator will show green.

Note: Allow the flashing LED indicators to stop after plugging the speaker system to the mains. This indicates that the speaker system is initialized and ready to be powered ON.



B Press and hold CONNECT button for 3 seconds while ZiiSound T6 is ON. BLUE LED will light up and fast blink.

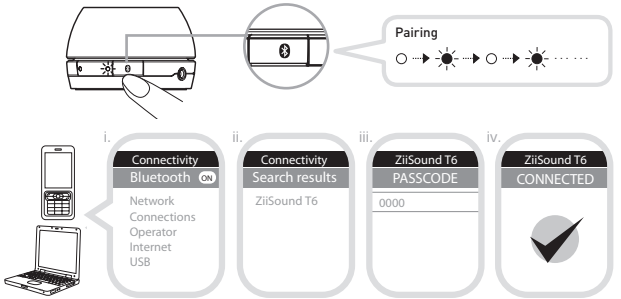

i. Turn on the *Bluetooth* feature on your device
ii. Search for ZiiSound T6
iii. Pair and connect to ZiiSound T6. If prompted for passcode, enter 0000.
iv. Pairing successful, ready to stream music

Note: The above are generic steps to pair a *Bluetooth* device, for more specific instructions on *Bluetooth* connectivity for your device, please consult your manufacturer's manual.

5 Switching between Paired Devices

Switch between your current connected device to your previous connected devices by following these steps:

Action	LED status	Status
Press CONNECT button for 1 second	ZiiSound T6 LED blinks and stay lit in Blue	Ready to stream music

Press the *Bluetooth* icon on the remote control to switch between paired devices.

Note: Ensure that your next paired devices' *Bluetooth* feature is ON and ready to accept connections.

6 Reset to factory setting

Follow these steps to return to factory settings and to clear paired device memory in the ZiiSound T6:

Action	LED status	Status
Power OFF the speaker. Press and hold Power button for 7 seconds. ZiiSound T6 will auto Power up. When the Blue LED starts to blink, ZiiSound T6 is ready for pairing.	Blue LED fast blinks	Pairing mode. Ready to accept connection from other devices

7 To establish a new connection between BT-D1 with ZiiSound T6

A Press and hold CONNECT button for 3 seconds while ZiiSound T6 is ON.

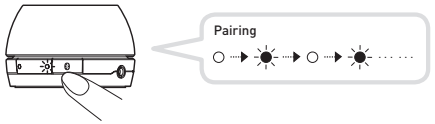

B Put the BT-D1 into pairing mode for pairing



C Press and hold the CONNECT button for 3 seconds then release.
Wait for LED pattern to turn from Pairing pattern to Connected pattern.



D Ready to stream music from computer

For Mac® OS:
a) Go to "System Preferences", choose "Sound"
b) Choose the Output tab, select "Creative Bluetooth *Audio D1"*

8 To reconnect the BT-D1 to a previously paired device

After the BT-D1 has been paired to device, it will always attempt to reconnect to the previously paired device when the BT-D1 is plugged into a USB port. Always ensure that the receiving device has its *Bluetooth* enabled and ready to accept connections. You may also try the following.

A) Ensure that the receiving device has its *Bluetooth* enabled and ready to accept connections

B1) With the BT-D1 in the computer USB port, press the CONNECT button on the BT-D1 to initiate a connection to your device.



OR

B2) Plug out and plug in your BT-D1 from the computer and wait for it to auto connect

Note: The BT-D1 will stream any audio (including startup, shutdown or warning tones) played from your computer. Ensure that the volume is kept to a comfortable level.



To disconnect from The BT-D1

To stop streaming music from the BT-D1 to your receiving *Bluetooth* device, simply either plug out the BT-D1 or press the CONNECT button once. Pressing once more will reconnect the BT-D1 back to its last connected *Bluetooth* device.

9.1 Enjoy 5.1 audio via USB connection

Windows XP setup

1. Plug in the USB cable, wait for a series of "**Found New Hardware**" messages to appear on your computer screen.

Note: If you do not see these messages, the capability to display them may be disabled in your computer. Wait for 1-2 minutes before proceeding to the next step. Alternatively, you could try another USB port.

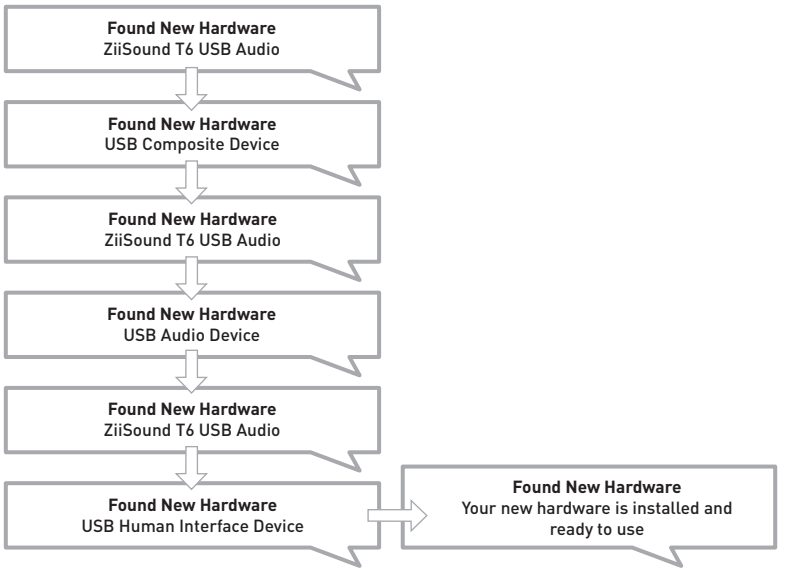

In Windows XP Control Panel, open **Sounds and Audio Devices Properties.**

Under the Audio tab, verify that **ZiiSound T6 USB Audio** is selected under **Sound playback**.

Under **Sound playback** setting, click the **Advanced** button to open **Advanced Audio Properties.**

In the **Speaker** setup drop list, select **5.1 surround sound speakers.**

Click **Apply** and then **OK.**

Your ZiiSound T6 is now ready for use.

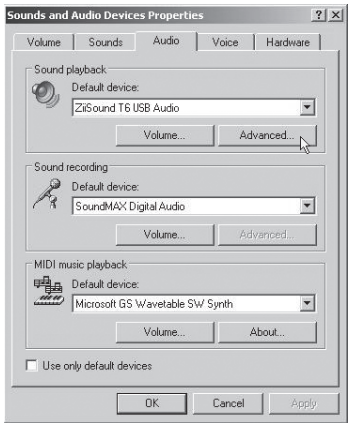

9.2 Windows Vista / 7 Setup

A **Please ensure that the correct audio source is selected by right clicking on the Volume icon on the system tray.**

B **Select Playback Devices.**

C **Select ZiiSound T6 USB Audio and click Set default.**

D **Click on Configure and ensure that 5.1 surround is selected under Audio Channels.**

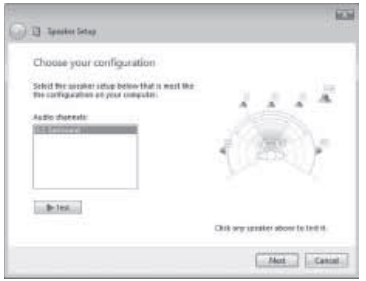

E **Click Next for the next few configuration windows to accept defaults until setup is finished.**

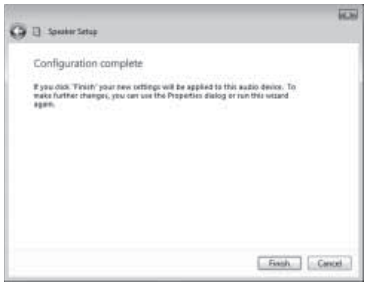

9.3 Mac OS® X audio setup

A Open the Applications, Utilities then Audio MIDI Setup.

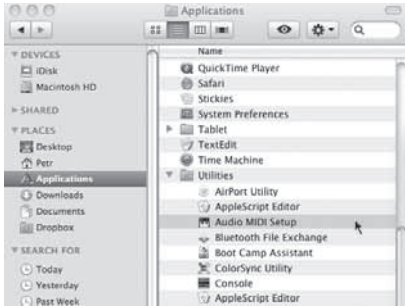

B Select on ZiiSound T6 USB Audio, click on Output, click on Configure Speakers

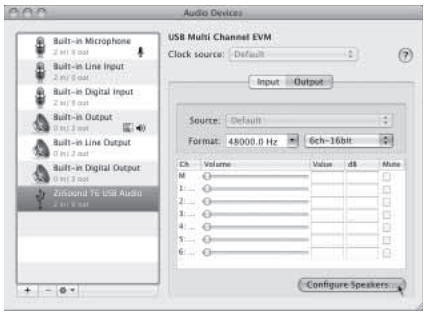

C Select 5.1 Surround, click Apply and then click Done.

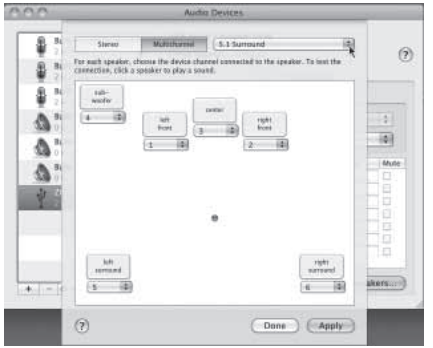

D Close all panels. Your ZiiSound T6 is now ready for use.

10 Playback with other audio devices via AUX In

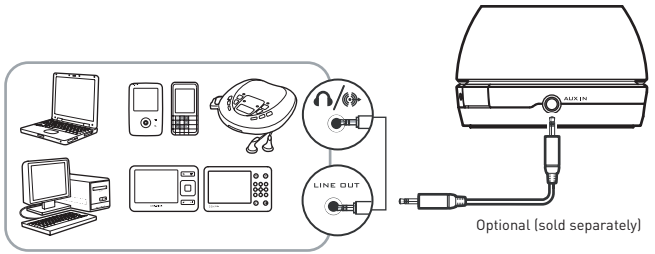

Optional (sold separately)

11 Wall-mountable satellites

Ziisound T6 satellites can be wall-mountable, for more specific instructions on wall mounting, please consult your wall mount adapter manufacturer's manual.

For more information, please refer to creative.com/products/speakers/wallmount

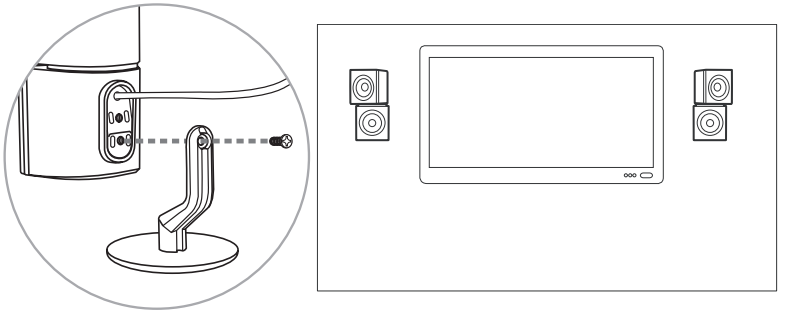

FAQ
Perform the following trouble-shooting steps before sending it for servicing. For more information, please refer to support.creative.com

There's no *Bluetooth* link between my device and the ZiiSound T6. What should I do?
- Delete the ZiiSound T6 name entry from your *Bluetooth* device paired memory list and perform the steps Section 4 (To pair and connect the ZiiSound T6 with other *Bluetooth* devices) to re-pair your device with ZiiSound T6
- Position them within 1 meter or closer to each other if you experience pairing difficulties
- Ensure that both your *Bluetooth* device and ZiiSound T6 are not connected to any other devices

Bluetooth link is established and paired between the devices but there's no music. What should I do?
- With some built-in *Bluetooth* enable computers, 3rd party USB *Bluetooth* dongles or other devices, you may be required to manually specify/ setup the audio output as ZiiSound T6, e.g., (under sound and audio devices section on your computer's operating system) Please consult your manufacturer's documentation for further information.

European Compliance

This product conforms to the following:

EMC Directive 2004/108/EC.

Mains operated products for the European market comply with Low Voltage Directive 2006/95/EC and Commission Regulation(s) Implementing Directive (2005/32/EC).

Communication / RF wireless products for the European market comply with R&TTE Directive 1999/5/EC.

CAUTION:
To comply with the Europe CE requirement, this device must be installed with CE certified computer equipment which meet with Class B limits.
All cables used to connect this device must be shielded, grounded and no longer than 3m in length. Operation with non-certified computers or incorrect cables may result in interference to other devices or undesired effects to the product.

MODIFICATION:
Any changes or modifications not expressly approved by Creative Technology Limited or one of its affiliated companies could void the user's warranty and guarantee rights.

DECLARATION OF CONFORMITY
According to LVD Directive (2006/95/EC) and R&TTE Directive (1999/5/EC)

Company Name	:	Creative Technology Ltd
Company Address	:	31, International Business Park Creative Resource Singapore 609921

Declare under our sole responsibility that the product(s):

Speaker Product Name	: ZiiSound T6
Speaker Model Number	: MF0375
USB Transmitter Model Number	: MZ0440
Intended Use	: Office and Home Usage
Restrictive use	: Nil

To which this declaration relates are in conformity with the following standard(s):

Radio	:	EN 300 328 V1.7.1: 2006
EMI/EMC	:	EN 55013: 2001 + A1: 2003 + A2: 2006 EN 55020: 2007 EN 55022: 2006 + A1:2007 EN55024:1998 + A1:2001 + A2: 2003 EN 61000-3-2:2006 + A1:2009 + A2:2009 EN 61000-3-3:2008 EN 301 489-1 V1.8.1: 2008 EN 301 489-17 V2. 1.1:2009
Safety	:	IEC 60065: 2001 + A1: 2005 + A2:2010 / EN 60065: 2002 + A1: 2006 + A11: 2008 EN 50371: 2002
Energy Efficiency	:	EN 62301: 2005 + Annex II of EC No.1275/2008

Technical documentation for this product(s) is retained at the following address:

Company Name	:	Creative Technology Ltd
Company Address	:	31, International Business Park Creative Resource Singapore 609921

CE